

ABN: 47 095 792 288

Level 9, 553 Hay St  
Perth, WA 6000

T: +61 8 6374 1700

E: info@panres.com

## ASX ANNOUNCEMENT

1 August 2022

# Savannah Underground Drilling Continues to Deliver

### KEY POINTS


- Second underground drill fan to infill the Savannah orebody immediately above the 900 Fault has been completed
- Mineralisation thicknesses continue to be significantly better than predicted:
  - 28.9m @ 1.16% Ni; 0.74% Cu and 0.06% Co from 97.2m in KUD1931 including
    - 19.1m @ 1.52% Ni, 0.84% Cu and 0.08% Co from 107.0m
  - 17.4m @ 1.02% Ni; 1.38% Cu and 0.05% Co from 117.4m in KUD1938 including
    - 7.6m @ 1.60% Ni, 1.85% Cu and 0.08% Co from 117.4m
  - 9.0m @ 2.95% Ni; 0.06% Cu and 0.15% Co from 162.0m in KUD1943
- Results from the first two drill fans above the 900 Fault have the potential to significantly increase the Savannah Mineral Resource in this area of the mine and support the development of a second mining front to support mining operations at Savannah North
- Drilling ongoing and to be followed immediately by a program to test the Savannah orebody below the 900 Fault

Panoramic Resources Limited (ASX: PAN) (“**Panoramic**” or the “**Company**”) is pleased to provide an update on ongoing infill underground Resource definition drilling at the Company’s Savannah Nickel Project in Western Australia. In the June quarter the Company commenced a new underground drill program to test and infill the poorly drilled area of the Savannah orebody located immediately below historical workings and above the 900 Fault (Figure 1). The drill program is being undertaken from a drill caddy on the 1425 level that was recently developed as part of ongoing mine access to this area of the Savannah mine.

The 1425 level and subsequent mine development in this area provides much improved drill angles (near perpendicular to strike) to evaluate this part of the Savannah orebody. When completed this development is also ideally positioned to continue testing the orebody below the 900 Fault which currently contains a Mineral Resource of 14,900 nickel tonnes at an average grade of 1.65% nickel.

Results for the second drill fan of three holes completed above the 900 Fault from the 1425 drill caddy continue to return significantly thicker mineralisation intercepts than predicted by the current Savannah resource model (Figure 2). In the second completed drill fan, the increased thicknesses are noticeable in all three drill holes with the highest grade reported in the third and deepest drill hole (KUD1943) as the orebody approaches the 900 Fault.

The significantly thicker mineralised intercepts returned by the first two completed drill fans above the 900 Fault, coupled with the flatter plunge on the mineralisation indicated by KUD1943, will undoubtedly increase the current Mineral Resource in this area of the mine.

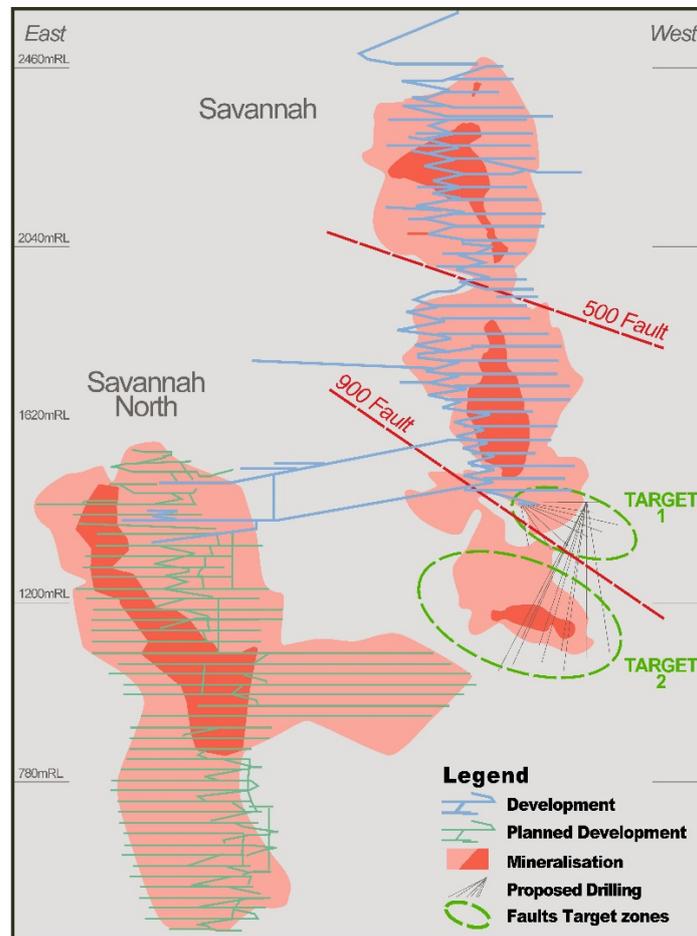


**Figure 1: Schematic of T1 target above the 900 Fault (subject of this announcement) and the future T2 target**

The results for the three drill holes completed on the second drill fan of the current program targeting above the 900 Fault are:

- 28.9m @ 1.16% Ni, 0.74% Cu and 0.06% Co from 97.2m in KUD1931, including:
  - 19.1m @ 1.52% Ni, 0.84% Cu and 0.08% Co from 107.0m
- 17.4m 1.02% Ni, 1.38% Cu and 0.05% Co from 117.4m in KUD1938m, including:
  - 7.6m @ 1.60% Ni, 1.85% Cu and 0.08% Co from 117.4m
- 9.0m @ 2.95% Ni, 0.06% Cu and 0.15% Co from 162.0m in KUD1943

The aim now remains to complete the program pattern of holes above the 900 Fault as indicated in Figure 1 (Target 1) and Figure 3, followed by the update of the Mineral Resource and mine plan for this area during the calendar year. Once the drill program above the 900 Fault is completed the plan is to then begin testing and upgrade the Savannah resource below the 900 Fault in 2023.

Additional details of the drill holes mentioned in the announcement are contained in Table 1, Appendix 1. The appropriate JORC 2012 Compliance Tables for the announcement are located in Appendix 2.

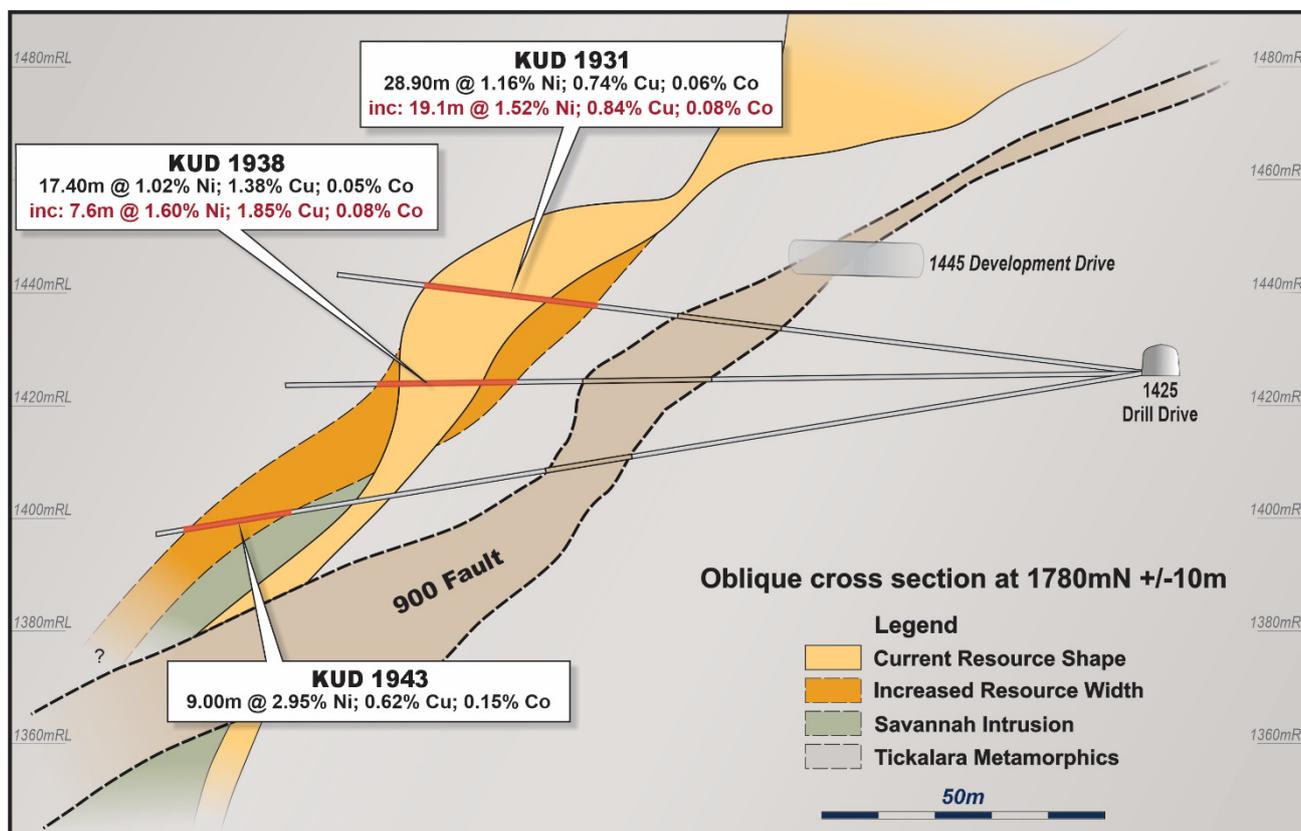

**Figure 2: Oblique cross section at 1780mN +/-10m showing drill holes KUD1931, 1938 and 1943, current Resource shape and proposed mineralisation model**

Commenting on the drill program, Managing Director and CEO, Victor Rajasooriar said:

*“The continued success of the drill program to infill the poorly drilled area of the Savannah orebody immediately above the 900 Fault is very pleasing. The results from the second completed drill fan in this area strongly support the recently reported returns from the first drill fan and together they show potential to increase our mineral inventory above the 900 Fault and support the planned opening of a new mining front in the Savannah orebody over the next 12 months to support the current mining operations at Savannah North. We look forward to announcing more drill results from these drill programs in due course.”*

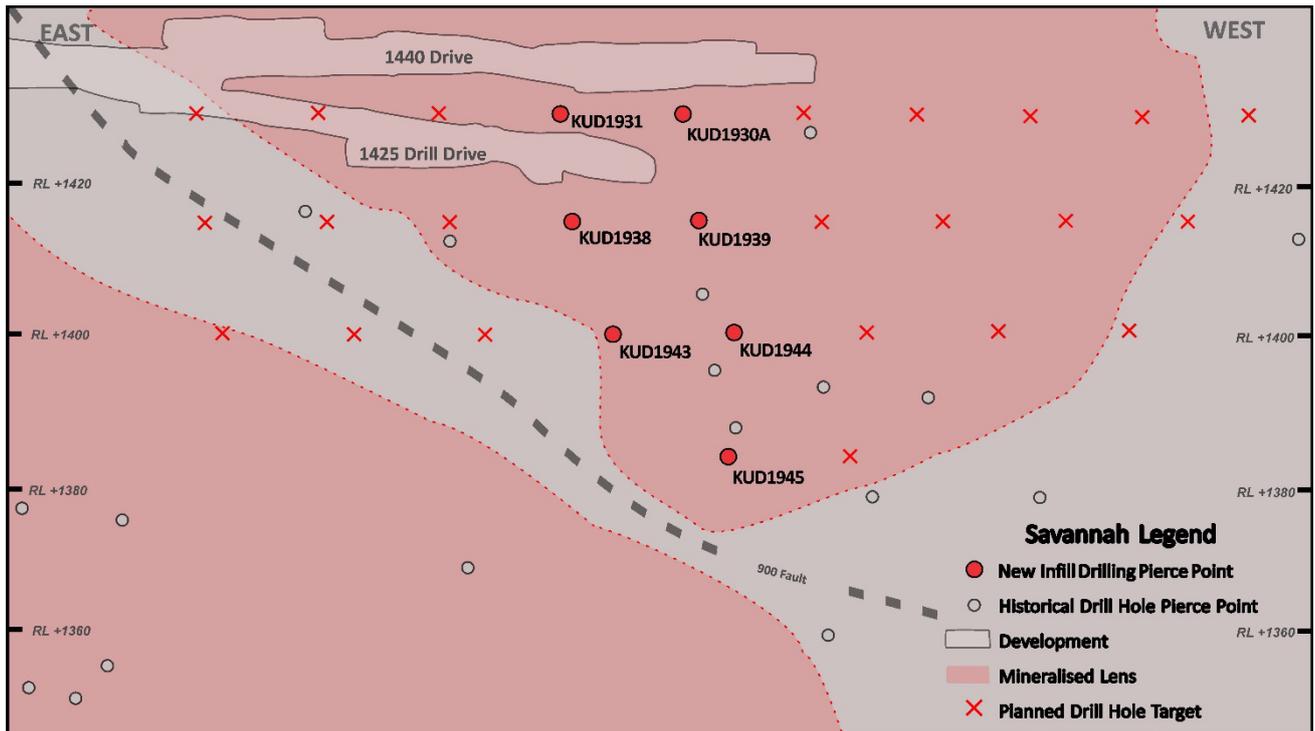


Figure 3: Long-section of the Resource definition drilling at Savannah and historic Resource definition drilling intercepts with development drives and proposed drilling

## Competent Person

The information in this release that relates to Exploration Drilling at Savannah is based on information compiled by Andrew Shaw-Stuart. Andrew Shaw-Stuart is a member of the Australian Institute of Geoscientists (AIG) and is a full-time employee of Panoramic Resources Limited.

The aforementioned has sufficient experience that is relevant to the style of mineralisation and type of target/deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the Australian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr Shaw-Stuart consents to the inclusion in the release of the matters based on the information in the form and context in which it appears.

## About Panoramic:

Panoramic Resources Limited (ASX: PAN) is a company headquartered in Perth, Western Australia, which owns the Savannah Nickel Project in the East Kimberley. Operations at Savannah were restarted in 2021 and the project was successfully recommissioned with first concentrate shipment achieved in December 2021. Savannah has a 12-year mine life with clear potential to further extend this through ongoing exploration. The asset provides excellent leverage to the nickel, copper and cobalt markets which are heavily linked to global decarbonisation and vehicle electrification.

## Forward Looking Statements:

This announcement contains certain “forward-looking statements” and comments about future matters. Forward-looking statements can generally be identified by the use of forward-looking words such as, “expect”, “anticipate”, “likely”, “intend”, “should”, “could”, “may”, “predict”, “plan”, “propose”, “will”, “believe”, “forecast”, “estimate”, “target” “outlook”, “guidance” and other similar expressions within the meaning of securities laws of applicable jurisdictions. Indications of, and guidance or outlook on, future earnings or financial position or performance are also forward-looking statements. You are cautioned not to place undue reliance on forward-looking statements. Any such statements, opinions and estimates in this announcement speak only as of the date hereof and are based on assumptions and contingencies subject to change without notice, as are statements about market and industry trends, projections, guidance and estimates. Forward-looking statements are provided as a general guide only. The forward-looking statements contained in this announcement are not indications, guarantees or predictions of future performance and involve known and unknown risks and uncertainties and other factors, many of which are beyond the control of the Company, and may involve significant elements of subjective judgement and assumptions as to future events which may or may not be correct.

There can be no assurance that actual outcomes will not differ materially from these forward-looking statements. A number of important factors could cause actual results or performance to differ materially from the forward-looking statements. The forward-looking statements are based on information available to the Company as at the date of this announcement.

Except as required by law or regulation (including the ASX Listing Rules), the Company undertakes no obligation to supplement, revise or update forward-looking statements or to publish prospective financial information in the future, regardless of whether new information, future events or results or other factors affect the information contained in this announcement.

**This ASX announcement was authorised on behalf of the Panoramic Board by:** Victor Rajasooriar, Managing Director & CEO

**For further information contact:**  
**Victor Rajasooriar, Managing Director & CEO**  
**+61 8 6374 1700**

**Media inquiries:**  
**Michael Vaughan, Fivemark Partners**  
**+61 422 602 720**

## Appendix 1

**Table 1- Summary of Savannah Drilling 2022**

Hole	East	North	RL	Dip	Azi	EOH	From	To	Intercept Label
	(m)	(m)	(m)	(°)	(°)	(m)	(m)	(m)	(m@%Ni,%Cu,%Co)
KUD1931	391685	8085817	1426	5.6	316	129.9	97.2	126.1	28.9m @ 1.16% Ni, 0.74% Cu, 0.06% Co
including							107.0	126.1	19.1m @ 1.52% Ni, 0.84% Cu, 0.08% Co
KUD1938	391685	8085817	1426	-2.1	317.1	152.2	117.4	134.8	17.4m @ 1.02% Ni, 1.38% Cu, 0.05% Co
including							117.4	125.0	7.6m @ 1.60% Ni, 1.85% Cu, 0.08% Co
KUD1943	391685	8085817	1426	-10.6	316.6	183.0	162.0	171.0	9.0m @ 2.95% Ni, 0.06% Cu, 0.15% Co

- Notes:
1. Intervals are down-hole lengths, not true-widths.
  2. Parameters: 0.5% Ni lower-cut off, with a minimum reporting interval of 1m and with discretionary internal waste to a maximum of 2.0 consecutive metres.
  3. SG calculated by immersion method.

## Appendix 2

### Appendix 2 – 2012 JORC Disclosures

**Savannah Project - Table 1, Section 1 - Sampling Techniques and Data**

Criteria	JORC Code explanation	Commentary
<b>Sampling techniques</b>	<ul style="list-style-type: none"> <li>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In</li> </ul>	<ul style="list-style-type: none"> <li>The Savannah mine and surrounding exploration areas are typically sampled by diamond drilling techniques. Over 1600 holes have been drilled within the mine for a total in-excess of 220,000m. The majority of holes were drilled from underground platforms.</li> <li>Initial Resource definition drilling is conducted on a nominal 50 x 50 metre grid spacing with subsequent infill grade control drilling conducted on a nominal 25 x 25 metre grid spacing.</li> <li>Historically, all drill hole collars were surveyed using Leica Total Station survey equipment by a registered surveyor. Down hole surveys are typically performed every 30 metres using either "Reflex EZ Shot" or "Flexit Smart Tools".</li> <li>All diamond core is geologically logged with samples (typically between 0.2 metre to 1 metre long) defined by geological contacts. Analytical samples are dominantly sawn half core samples. Sample preparation includes</li> </ul>

Criteria	JORC Code explanation	Commentary
	<p>other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</p>	<p>pulverising to 90% passing 75 µm followed by either a 3 acid digest &amp; AAS finish at the Savannah onsite laboratory or a total 4 acid digest with an ICP OES finish if the samples are analysed off-site.</p> <ul style="list-style-type: none"> <li>• Since 2019 Bureau Veritas has operated the on-site laboratory. Sample preparation and assaying of all drill samples now involves crushing and pulverizing the sample to 80% passing 75µm followed by Ni, Cu, Co, Fe, MgO and S analysis by XRF of metaborate fused glass beads. The XRF brand is a ZETIUM Pan-analytical instrument.</li> </ul>
<b>Drilling techniques</b>	<ul style="list-style-type: none"> <li>• Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>	<ul style="list-style-type: none"> <li>• Greater than 90% of the mine drill hole database consists of LTK60 and NQ2 size diamond holes. Exploration and Resource definition drill holes are typically NQ2 size. Infill grade control holes are typically LTK60. Historically, some RC holes were drilled about the upper part of the mine.</li> <li>• The diamond drill holes pertaining to this announcement were a combination of NQ2 and LTK60 size.</li> </ul>
<b>Drill sample recovery</b>	<ul style="list-style-type: none"> <li>• Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>• Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>• Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	<ul style="list-style-type: none"> <li>• Diamond core recoveries are logged and recorded in the database. Overall recoveries are typically &gt;99% and there are no apparent core loss issues or significant sample recovery problems.</li> <li>• Hole depths are verified against core blocks.</li> <li>• Regular rod counts are performed by the drill contractor.</li> <li>• There is no apparent relationship between sample recovery and grade.</li> </ul>
<b>Logging</b>	<ul style="list-style-type: none"> <li>• Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>• Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</li> <li>• The total length and percentage of the relevant intersections logged.</li> </ul>	<ul style="list-style-type: none"> <li>• All diamond holes pertaining to this announcement were geologically logged in full.</li> <li>• Geotechnical logging was carried out for recovery and RQD. The number of defects (per interval) and their roughness were recorded about ore zones.</li> <li>• Details of structure type, alpha angle, infill, texture and healing is also recorded for most holes and stored in the structure table of the mine drill hole database.</li> <li>• Logging protocols dictate lithology, colour, mineralisation, structural (DDH only) and other features are routinely recorded.</li> <li>• All diamond core was photographed wet.</li> </ul>
<b>Sub-sampling techniques and sample preparation</b>	<ul style="list-style-type: none"> <li>• If core, whether cut or sawn and whether quarter, half or all core taken.</li> <li>• If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>• For all sample types, the nature, quality and appropriateness of the sample preparation</li> </ul>	<ul style="list-style-type: none"> <li>• Analytical core samples pertaining to this announcement were half core.</li> <li>• Sample sizes are considered appropriate to represent the Savannah North style of mineralisation.</li> <li>• SG determinations by water immersion technique are restricted to Resource definition</li> </ul>

Criteria	JORC Code explanation	Commentary
	<p>technique.</p> <ul style="list-style-type: none"> <li>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> <li>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul>	<p>and Exploration holes at Savannah and are not performed on grade control holes.</p> <ul style="list-style-type: none"> <li>All core sampling and sample preparation follow industry best practice.</li> <li>QC involves the addition of purchased CRM and Savannah derived CRM assay standards, blanks, and duplicates. At least one form of QC is inserted in most sample batches on average one in every 20 samples.</li> <li>Original versus duplicate assay results have always shown strong correlation due to the massive sulphide rich nature of the Savannah North mineralisation.</li> </ul>
<b>Quality of assay data and laboratory tests</b>	<ul style="list-style-type: none"> <li>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</li> <li>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</li> </ul>	<ul style="list-style-type: none"> <li>All sample analyses pertaining to this announcement were performed at the Savannah Nickel Mine on-site laboratory, which is operated by Bureau Veritas. Sample preparation and assaying of all drill samples involves crushing and pulverizing the sample to 80% passing 75µm followed by Ni, Cu, Co, Fe, MgO and S analysis by XRF of metaborate fused glass beads. The XRF brand is a ZETIUM Pan-analytical instrument.</li> <li>No other analytical tools or techniques are employed.</li> <li>The onsite laboratory uses internal standards, duplicates, replicates, blanks and repeats and carries out all appropriate sizing checks.</li> <li>External laboratory checks are occasionally performed. No analytical bias has been identified.</li> </ul>
<b>Verification of sampling and assaying</b>	<ul style="list-style-type: none"> <li>The verification of significant intersections by either independent or alternative company personnel.</li> <li>The use of twinned holes.</li> <li>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>Discuss any adjustment to assay data.</li> </ul>	<ul style="list-style-type: none"> <li>Drilling and sampling procedures at SNM have been inspected by many stakeholders since the project began.</li> <li>Throughout the life of the mine, there have been several instances where holes have been twinned to confirm intersections and continuity.</li> <li>In respect to the drill holes pertaining to this announcement, no holes were twinned.</li> <li>Holes are logged into OCRIS software on Toughbook laptop computers before the data is transferred to SQL server databases.</li> <li>All drill hole and assay data is routinely validated by site personnel.</li> <li>No adjustments are made to assay data.</li> </ul>
<b>Location of data points</b>	<ul style="list-style-type: none"> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>Specification of the grid system used.</li> </ul>	<ul style="list-style-type: none"> <li>All diamond drill hole collars are picked-up using Leica TS15, R1000 instrument by a registered mine surveyor.</li> <li>Downhole surveys are performed using an Axis Champ North Seeking Gyro instrument. Survey interval no more than 30m.</li> <li>Visual checks to identify any obvious errors</li> </ul>

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> <li>Quality and adequacy of topographic control.</li> </ul>	<p>regarding the spatial position of drill holes collars or downhole surveys are routinely performed in a 3D graphics environment using Surpac software.</p> <ul style="list-style-type: none"> <li>The mine grid is a truncated 4 digit (MGA94) grid system.</li> <li>Conversion from local grid to MGA GDA94 Zone 52 is calculated by applying truncated factor to local coordinates is E: +390000, N: +8080000.</li> <li>High quality topographic control is established across the mine site. RL equals AHD + 2,000m.</li> </ul>
<b>Data spacing and distribution</b>	<ul style="list-style-type: none"> <li>Data spacing for reporting of Exploration Results.</li> <li>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> <li>Whether sample compositing has been applied.</li> </ul>	<ul style="list-style-type: none"> <li>The Savannah and Savannah North Project nominal underground Resource Definition drill hole spacing is 25m (easting) by 25m (RL).</li> <li>The mineralized domains delineated by the drill hole spacing show enough continuity to support the classification applied under the JORC Coe (2012 Edition).</li> <li>No sample compositing is undertaken.</li> </ul>
<b>Orientation of data in relation to geological structure</b>	<ul style="list-style-type: none"> <li>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> <li>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</li> </ul>	<ul style="list-style-type: none"> <li>Where possible drill holes are designed to be drilled perpendicular to the target area being tested.</li> <li>No orientation sampling bias has been identified.</li> </ul>
<b>Sample security</b>	<ul style="list-style-type: none"> <li>The measures taken to ensure sample security.</li> </ul>	<ul style="list-style-type: none"> <li>Drill samples are collected and transported to the on-site laboratory by SNM staff. Samples sent off site are road freighted.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>The results of any audits or reviews of sampling techniques and data.</li> </ul>	<ul style="list-style-type: none"> <li>No recent audits/reviews of the Savannah drill sampling protocols have been undertaken. The procedures are considered to be of the highest industry standard. Mine to mill reconciliation records throughout the life of the Savannah Project provide confidence in the sampling procedures employed at the mine.</li> </ul>

**Savannah North Project - Table 1, Section 2 - Reporting of Exploration Results**

Criteria	JORC Code explanation	Commentary
<b>Mineral tenement and land tenure status</b>	<ul style="list-style-type: none"> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul>	<ul style="list-style-type: none"> <li>The Savannah Nickel Mine (SNM), incorporating the Savannah North Project is an operating mine secured by five contiguous Mining Licences, ML's 80/179 to 80/183 inclusive. All tenure is current and in good standing. SNM has the right to explore for and mine all commodities within the mining tenements.</li> <li>SNM has all statutory approvals and licences in place to operate. The mine has a long standing off-take agreement to mine and deliver nickel sulphide concentrate to the Trafigura Group.</li> </ul>
<b>Exploration done by other parties</b>	<ul style="list-style-type: none"> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>	<ul style="list-style-type: none"> <li>Since commissioning in 2004, SNM has conducted all surface and underground exploration and drilling related activities on the site.</li> </ul>
<b>Geology</b>	<ul style="list-style-type: none"> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>	<ul style="list-style-type: none"> <li>The SNM is based on mining ore associated with the Savannah and Savannah North palaeo-proterozoic mafic/ultramafic intrusions. The "Savannah-style" Ni-Cu-Co rich massive sulphide mineralisation occurs as "classic" magmatic breccias developed about the more primitive, MgO rich basal parts of the two intrusions.</li> </ul>
<b>Drill hole Information</b>	<ul style="list-style-type: none"> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> <li>easting and northing of the drill hole collar</li> <li>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>dip and azimuth of the hole</li> <li>down hole length and interception depth</li> <li>hole length.</li> </ul> </li> <li>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</li> </ul>	<ul style="list-style-type: none"> <li>All in-mine drilling at SNM is conducted on the Savannah mine grid, which is a "4 digit" truncated MGA grid. Conversion from local to MGA GDA94 Zone 52 is calculated by applying truncated factor to local coordinates of: E: +390000, N: +8080000. RL equals AHD + 2,000m.</li> <li>Additional drill hole information pertaining to this announcement includes: <ul style="list-style-type: none"> <li>All diamond holes were either NQ2 or LTK60.</li> <li>All core is oriented and photographed prior to logging, cutting and sampling.</li> <li>All intersection intervals are reported as down-hole lengths and not true widths.</li> <li>All reported assay results were performed by the on-site laboratory.</li> </ul> </li> </ul>
<b>Data aggregation methods</b>	<ul style="list-style-type: none"> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of</li> </ul>	<ul style="list-style-type: none"> <li>All analytical drill intercepts pertaining to this announcement are based on sample length by grade weighted averages using a 0.5% lower cut-off, a minimum reporting length of 1m and maximum of 2m on consecutive internal waste.</li> <li>Cu and Co grades are determined for the same Ni interval defined above using the same procedures.</li> </ul>

Criteria	JORC Code explanation	Commentary
	metal equivalent values should be clearly stated.	
<b>Relationship between mineralisation widths and intercept lengths</b>	<ul style="list-style-type: none"> <li>• These relationships are particularly important in the reporting of Exploration Results.</li> <li>• If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> <li>• If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</li> </ul>	<ul style="list-style-type: none"> <li>• All intersection lengths reported in this accompanying release are down hole lengths and not true widths.</li> <li>• Where reported, estimates of True Width are stated only when the geometry of the mineralisation with respect to the drill hole angle is sufficiently well established.</li> </ul>
<b>Diagrams</b>	<ul style="list-style-type: none"> <li>• Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</li> </ul>	<ul style="list-style-type: none"> <li>• A simplified sectional view of the drill hole intercept positions pertaining to this announcement is deemed sufficient at this time.</li> </ul>
<b>Balanced reporting</b>	<ul style="list-style-type: none"> <li>• Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</li> </ul>	<ul style="list-style-type: none"> <li>• Based on the fact that, all the drill results pertaining to the drill program described in this announcement are reported in the announcement, the report is considered to be sufficiently balanced.</li> </ul>
<b>Other substantive exploration data</b>	<ul style="list-style-type: none"> <li>• Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</li> </ul>	<ul style="list-style-type: none"> <li>• No other data is considered material to this release at this stage.</li> </ul>
<b>Further work</b>	<ul style="list-style-type: none"> <li>• The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> <li>• Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>	<ul style="list-style-type: none"> <li>• The infill Resource Definition drill results reported herein for the Savannah orebody are part of an ongoing program. Further results will be reported when they become available.</li> </ul>